

FACT SHEET



OIL / WATER / SOLIDS SEPARATORS

Clearmake Oil/Water/Solids Separators, renowned for durability and efficiency are manufactured in annealed stainless steel, a premium quality material selected for its durability, strength, corrosion resistance and appearance.

Superior performance is assured through employment of the Vertical Tube Coalescing (VTC) technology, facilitating superior flow characteristics, serviceability and durability.

Separators are available in off the shelf sizes from 720 to 20,000 L/h. Specialty units – up to >250,000 L/h – can be designed and manufactured.

Treatment systems can be designed and manufactured to meet intrinsically safe standards for hazardous areas.

Clearmake Separators represent superior quality at an affordable price. Plus fully compatible Clearmake Quick Break cleaning

products have been developed to ensure optimal performance and reduced maintenance.

Off the shelf separators carry Sydney Water approval and therefore meet the stringent trade waste requirements of each local authority.

Client Applications: Vehicle and equipment wash-down sites where water needs to be treated before discharge to sewer or the environment. These include fuel stations, automotive workshops, car dealerships, vehicle rental agencies, earthmoving companies, shipping container parks, marinas, plant & equipment hire, golf clubs, local government, mine sites and many others.

More Information:



Log on to www.clearmake.com.au or call **1800 700 267**

Clearmake is a member of



FACT SHEET

OIL / WATER / SOLIDS SEPARATORS

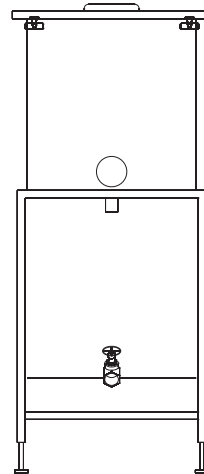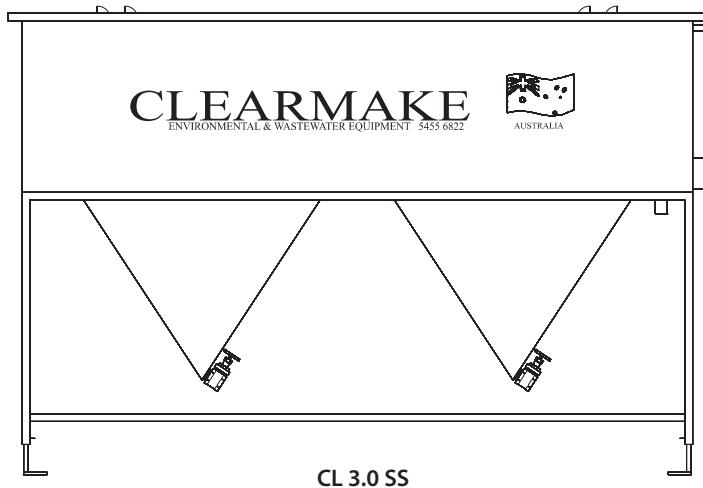


The separator shown is the CL 3.0 SS - all models are slightly different in design. See individual specification sheets for details.

Separator Specifications

Model	Length (mm)	Width (mm)	Height (mm)	Separator Tank Rated To (L/h)	Recommended Pump Flow Rate (L/h)*
CB 1.0 SS	1250	345	1290	1,000	720
CL 1.5 SS	1200	440	1290	1,500	720
CL 3.0 SS	1930	400	1350	3,000	1,500
CL 3.0 SS AQIS	1930	400	1350	3,000	1,500
CL 5.0 SS	2260	600	1525	5,000	4,500
CL 6.0 SS	2260	600	1525	6,000	5,400
CL 10.0 SS	2500	1200	1525	10,000	8,500
CL 15.0 SS	3100	1200	1525	15,000	12,000
CL 20.0 SS	3100	1600	1525	20,000	15,000
>CL 20.0 SS	Varies	Varies	Varies	Up to 250,000	Up to 250,000

*System performance may vary as a result of water quality and usage. When used in conjunction with quality cleaning products, such as Clearmake's Quick Break range of products you'll benefit from optional performance.

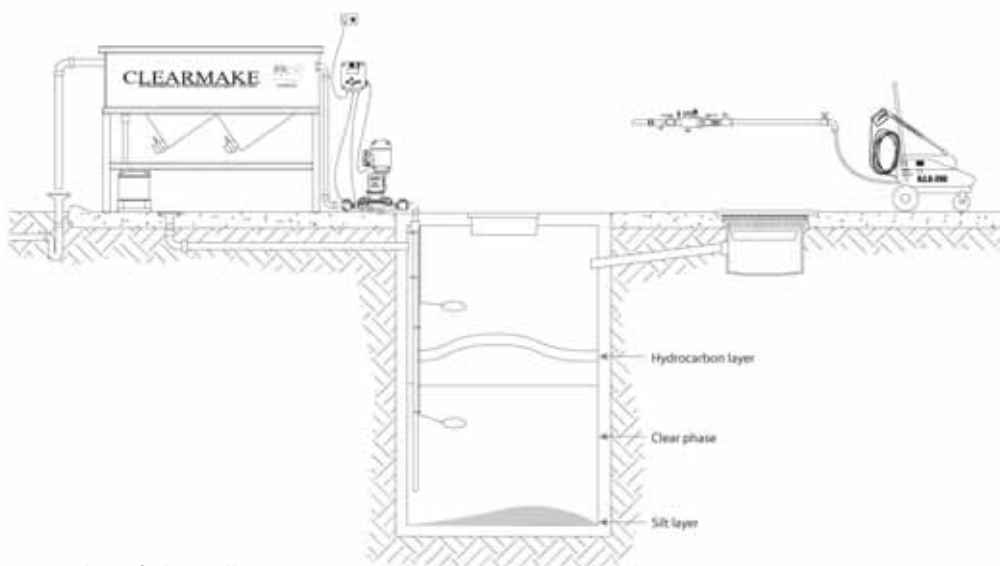

Typical Roofed Installation

With unroofed installations a storm water diversion valve is required.

All separators are made from type 304 stainless steel - For corrosive applications such as marine, all models can be produced in type 316 Stainless Steel.

A pump, control panel and in ground tank are required. Different pump and controller models are available from Clearmake to suit applications and flow rates. For hazardous areas, intrinsically safe equipment might be required, please inform Clearmake about your specific application.

*Actual flow rate depends on pump capacity.